



SUBMITTAL

FLEXIBLE HOSE W/EXTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

HG- FLEXIBLE HOSE W/ EXTERNAL HELIX

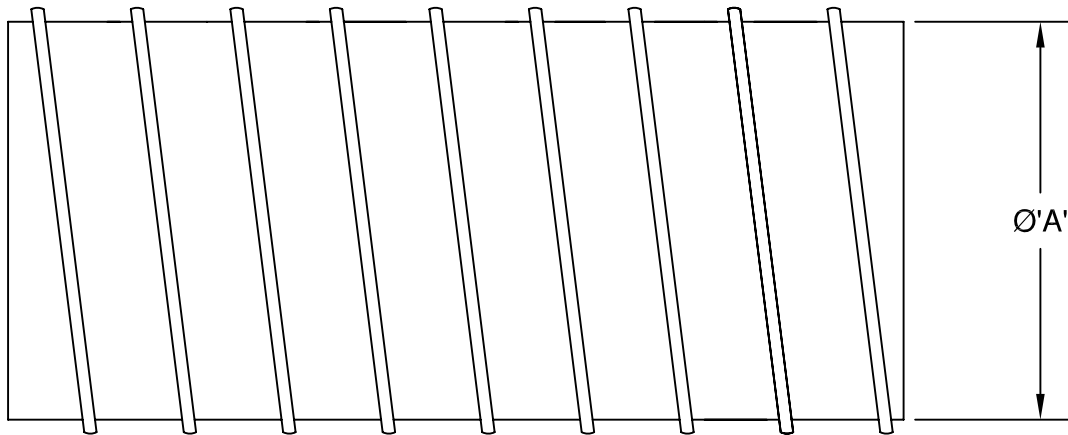

Ø'A'	LB/FT
3	0.40
4	0.40
5	0.54
6	0.60
8	0.80
10	1.08

SCHEDULE

ITEM	QTY	MODEL	'A'	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: HYPALON COATED NYLON WITH AN EXTERNAL METAL HELIX.

TEMPERATURE RANGE: -40° F TO 350° F.*

COLOR: DARK GREY WITH METAL HELIX.

BENEFITS: MECHANICALLY BONDED CORROSION RESISTANT HELIX OFFERS A STRONG, ADHESIVE-FREE CONSTRUCTION WITH SUPERIOR WEAR RESISTANCE.

COMPRESSION RATIO: 6:1.

ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.