



SUBMITTAL

FLEXIBLE HOSE W/INTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

HTN- FLEXIBLE HOSE W/ INTERNAL HELIX

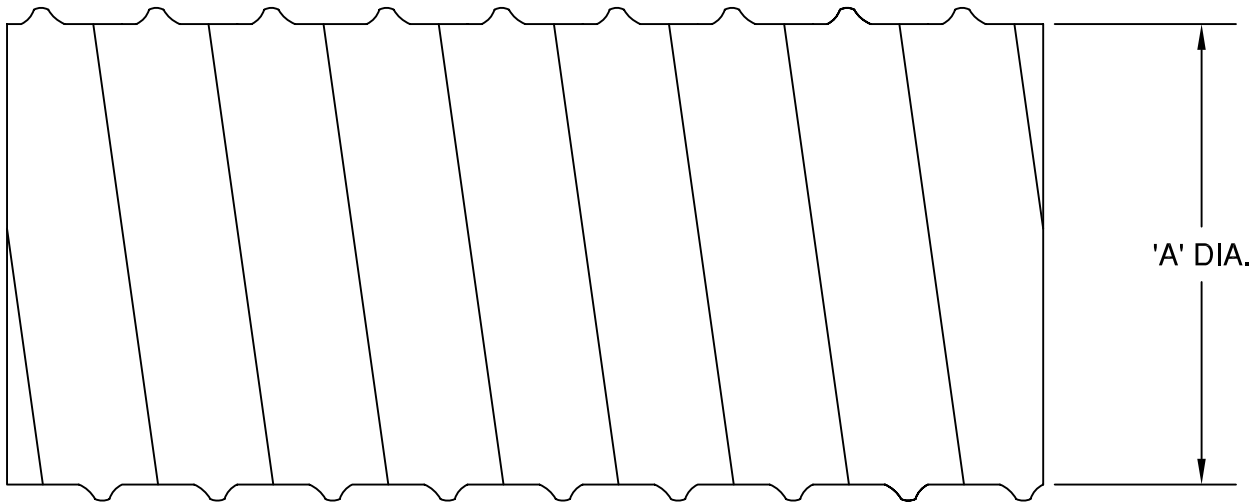

'A' DIA	LB/FT
4	0.5
5	0.6
6	0.8
8	1.3
10	1.6

SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: 2 PLY REINFORCED SILICONE COATED NOMEMX WITH A FULLY ENCLOSED STEEL WIRE HELIX.

TEMPERATURE RANGE: -60° F TO 600° F.*

COLOR: RED OXIDE.

BENEFITS: HANDLES HIGH AND LOW TEMPERATURE APPLICATIONS. COMBINES THE HIGH TEMPERATURE RESISTANCE OF SILICONE & SUPERIOR FLEXIBLE FATIGUE OF NOMEMX. ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.