

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

NG- FLEXIBLE HOSE W/ EXTERNAL HELIX

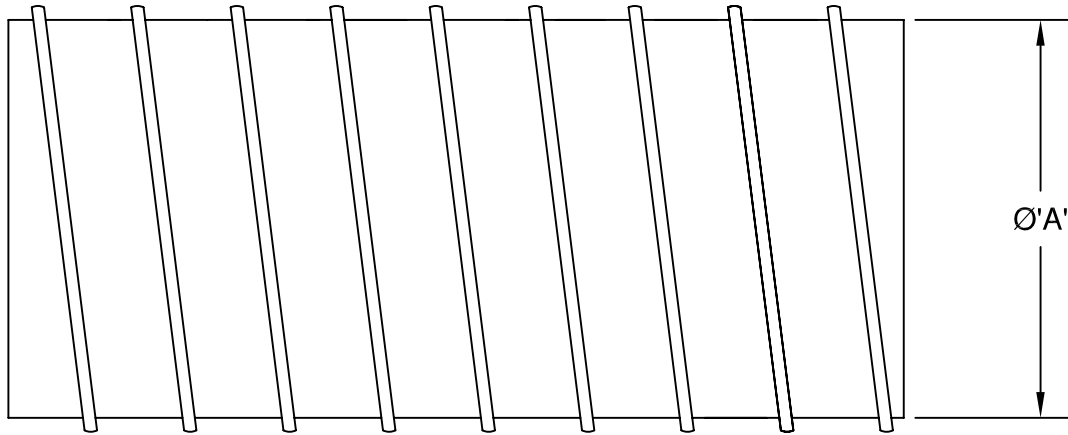

Ø'A'	LB/FT
3	0.40
4	0.40
5	0.54
6	0.60
8	0.80
10	1.08

SCHEDULE

ITEM	QTY	MODEL	'A'	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: NEOPRENE COATED POLYESTER FABRIC WITH AN EXTERNAL GALVANIZED STEEL HELIX.
 TEMPERATURE RANGE: -30° F TO 300° F.*
 COLOR: BLACK WITH METAL HELIX.
 BENEFITS: UL 94V-0 FLAME RESISTANT HOSE IS LIGHT WEIGHT AND EXTREMELY FLEXIBLE. MECHANICALLY BONDED CORROSION RESISTANT HELIX OFFERS A STRONG, ADHESIVE-FREE CONSTRUCTION WITH SUPERIOR WEAR RESISTANCE.
 COMPRESSION RATIO: 6:1.
 ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.