

PROJECT:

LOCATION:


ENGINEER:

SALES ENGINEER:

ARCHITECT:


CONTRACTOR:

DATE:

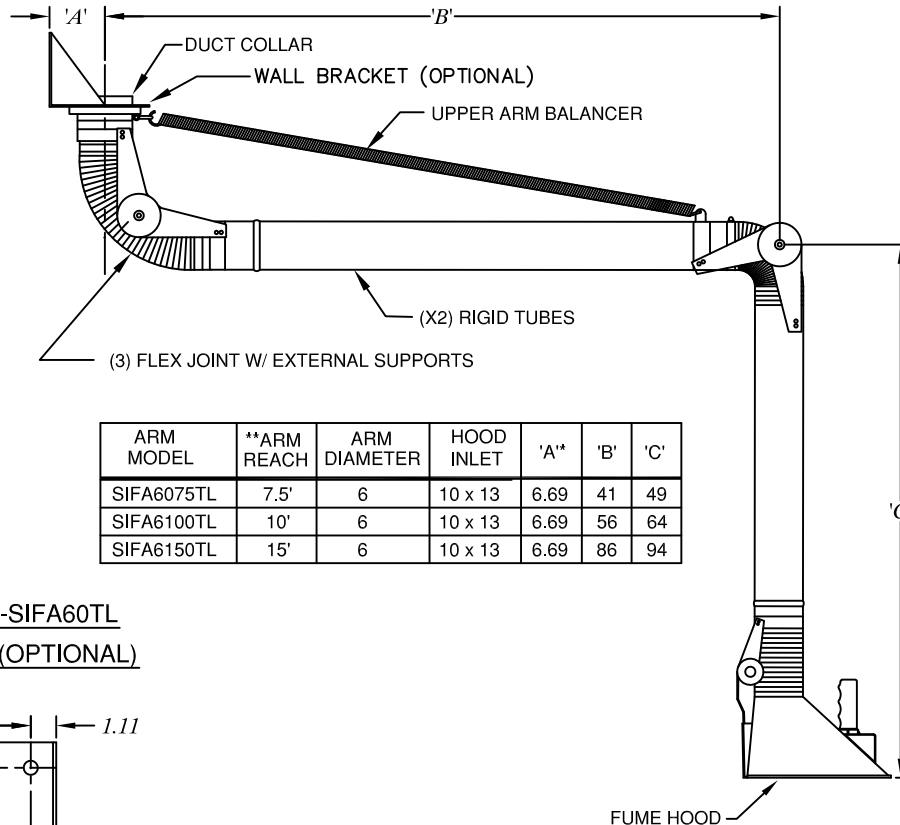

ARM MODEL	**ARM REACH	ARM DIAMETER	HOOD INLET	'A'*	'B'	'C'
SIFA6075TL	7.5'	6	10 x 13	6.69	41	49
SIFA6100TL	10'	6	10 x 13	6.69	56	64
SIFA6150TL	15'	6	10 x 13	6.69	86	94

\* MODEL - WM-SIFA60TL  
WALL BRACKET (OPTIONAL)

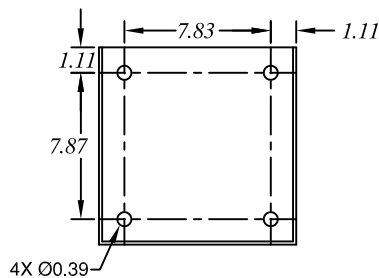

### SCHEDULE

ITEM	QTY	MODEL	REFERENCE

**NOTES:**

- BALL BEARING WALL SWIVEL ROTATES 360°
- WALL BRACKET - CONTINUOUS WELDED 11GA PAINTED STEEL
- RIGID TUBES - POWDER COATED STEEL
- FLEXIBLE TUBING - PVC/POLYESTER
- INLET HOOD - NONCONDUCTIVE POLYCARBONATE
- VOLUME DAMPER - POLYCARBONATE
- EXTERNAL SUPPORTS - CAST ALUMINUM
- FAN AND/OR LIGHT CONTROL SWITCHES OPTIONAL
- \* CONSULT FACTORY FOR ALTERNATE HOODS
- UNLESS OTHERWISE SPECIFIED ALL DIMENSION IN INCHES.
- 200 DEGREE F. MAX OPERATING TEMP