



# SUBMITTAL

## FLEXIBLE HOSE W/EXTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

### HT1200 - FLEXIBLE HOSE W/ EXTERNAL HELIX

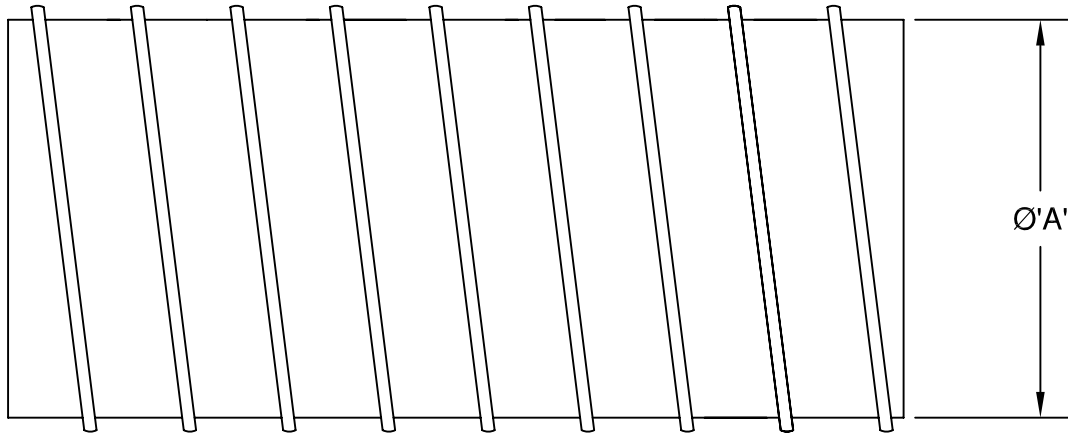

Ø'A'	LB/FT
3	0.83
4	1.07
5	1.33
6	1.58
8	2.10
10	2.63

### SCHEDULE

ITEM	QTY	MODEL	'A'	LENGTH	REFERENCE

**NOTES:**

CONSTRUCTION: SPECIAL-COATED 2-PLY, FABRIC WITH EXTERNAL GALVANIZED STEEL HELIX.

TEMPERATURE RANGE: -75° F TO 1200° F.\*

COLOR: ORANGE WITH METAL HELIX.

BENEFITS: HOSE HAS ASBESTOS-FREE FABRIC, SPECIALLY COATED WITH HEAT-STABILIZERS, REINFORCED WITH STAINLESS STEEL WIRE MECHANICALLY BONDED WITH EXTERNAL HELIX.

COMPRESSION RATIO: 3:1.

ALL DIMENSIONS IN INCHES AND NOMINAL.

\*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.