



# SUBMITTAL

## FLEXIBLE HOSE W/INTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

### VMX- FLEXIBLE HOSE W/ INTERNAL HELIX

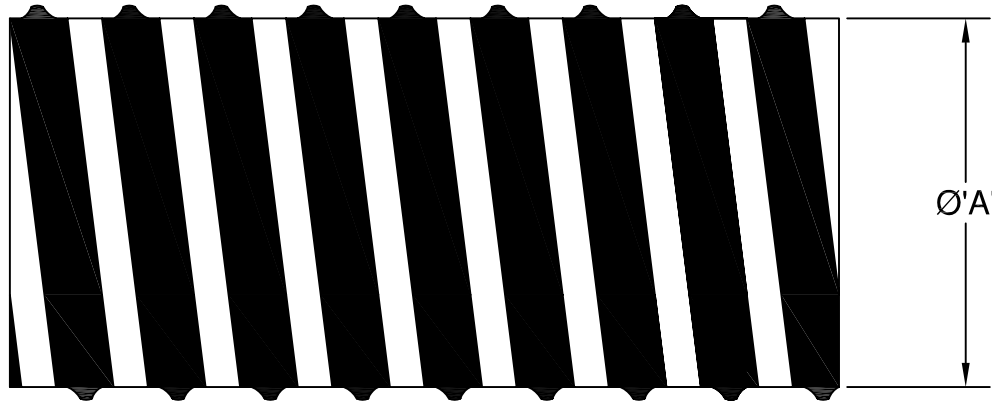

Ø'A'	LB/FT
3	0.5
4	0.6
5	0.8
6	0.9
8	1.2
10	1.5

### SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

**NOTES:**

CONSTRUCTION: DOUBLE THICK, FLEXIBLE HIGH TENSILE STRENGTH WEAVE FABRIC SATURATED WITH SPECIAL POLYMERIC RESINS & HEAT CURED WITH AN ENCLOSED WIRE HELIX.

TEMPERATURE RANGE: -65° F TO 350° F.\*

COLOR: YELLOW FABRIC W/BLUE WEAR STRIP.

BENEFITS: UL 94VTM-D FLAME RETARDANT HOSE IS LIGHT WEIGHT, WITH EXTERNAL SCUFF GUARD TO PROVIDE EXCELLENT ABRASION RESISTANCE.

ALL DIMENSIONS IN INCHES AND NOMINAL.

\*VENTAIRE TEMPERATURE RANGES STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.