

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

### WP - FLEXIBLE HOSE W/ INTERNAL HELIX

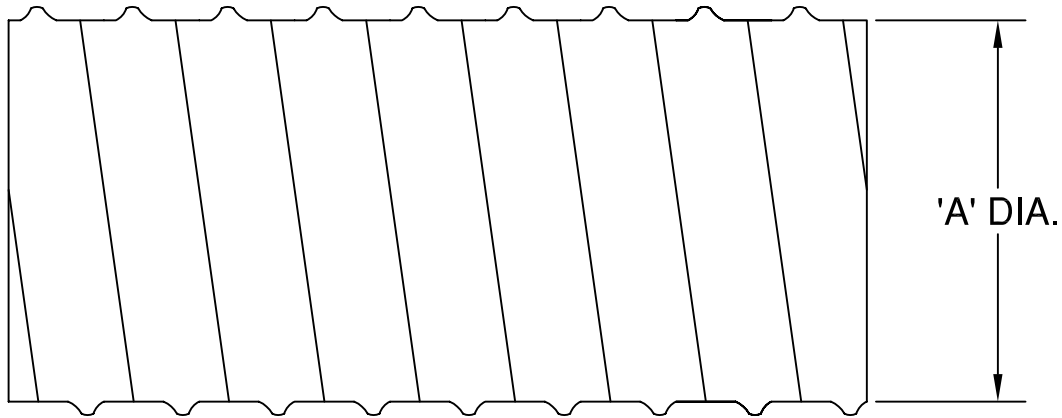

Ø'A'	LB/FT
4	0.57
5	0.70
6	0.95
8	1.09
10	1.36

### SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

**NOTES:**

CONSTRUCTION: DOUBLE PLY, NEOPRENE COATED POLYESTER WITH A FULLY ENCLOSED STEEL HELIX.

TEMPERATURE RANGE: -40° F TO 250° F.

COLOR: BLACK.

BENEFITS: UL 94V-0 FLAME RETARDANT HOSE IS LIGHTWEIGHT AND FLEXIBLE.

COMPRESSION RATIO: 3:1.

ALL DIMENSIONS IN INCHES AND NOMINAL.

\*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.