



# SUBMITTAL

## FLEXIBLE HOSE W/INTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

### WPN - FLEXIBLE HOSE W/ INTERNAL HELIX

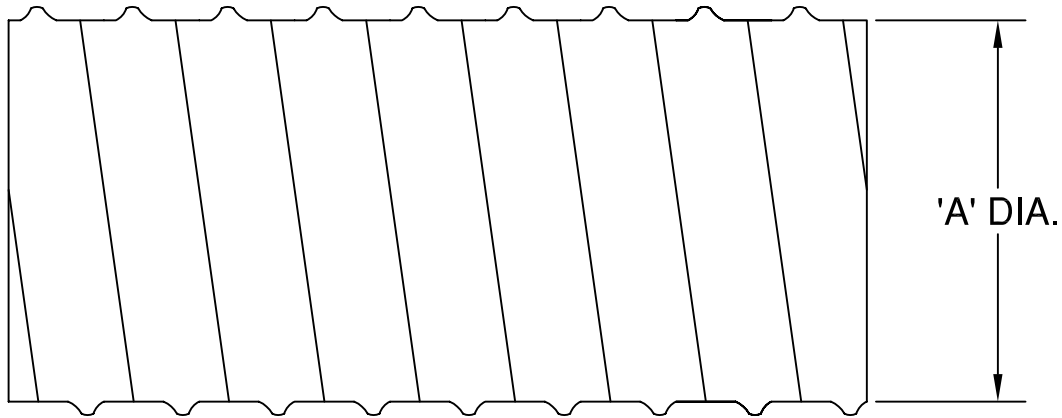

Ø'A'	LB/FT
3	0.50
4	0.70
5	0.82
6	0.94
8	1.37
10	1.48

### SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

**NOTES:**

CONSTRUCTION: DOUBLE PLY, NEOPRENE COATED POLYESTER WITH A FULLY ENCLOSED NON-CONDUCTIVE NYLON HELIX, SMOOTH-FLO BORE.

TEMPERATURE RANGE: -40° F TO 250° F.\*

COLOR: BLACK

BENEFITS: UL 94V-0 FLAME RETARDANT, NON-CONDUCTIVE HOSE IS LIGHTWEIGHT AND FLEXIBLE.

COMPRESSION RATIO: 2:1.

ALL DIMENSIONS IN INCHES AND NOMINAL.

\*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.