



SUBMITTAL

FLEXIBLE HOSE W/INTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

WPW - FLEXIBLE HOSE W/ INTERNAL HELIX & WEARSTRIP

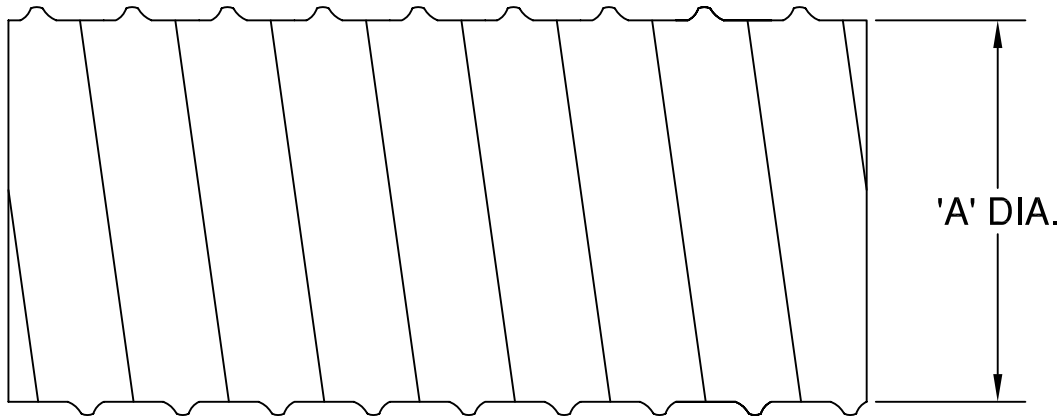

Ø'A'	LB/FT
4	0.54
5	0.56
6	0.86
8	1.31
10	1.79

SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: DOUBLE PLY, NEOPRENE COATED POLYESTER WITH A FULLY ENCLOSED STEEL HELIX AND WEARSTRIP.

TEMPERATURE RANGE: -40° F TO 250° F.*

COLOR: BLACK. WITH BLACK WEARSTRIP

BENEFITS: UL94V-0 FLAME RETARDANT HOSE IS LIGHTWEIGHT, FLEXIBLE, AND AN EXTERNAL SCUFF STRIP PROVIDES EXCELLENT ABRASION RESISTANCE.

COMPRESSION RATIO: 4:1.

ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.